

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
25 September 2003 (25.09.2003)

PCT

(10) International Publication Number
WO 03/078796 A1

(51) International Patent Classification⁷: E21F 17/02, 3/00

(21) International Application Number: PCT/US03/04200

(22) International Filing Date: 13 February 2003 (13.02.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/363,250 12 March 2002 (12.03.2002) US

(71) Applicant (for all designated States except US): PEM
MANAGEMENT, INC. [US/US]; 300 Delaware Avenue,
Suite 1225, Wilmington, DE 19801 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): SWANSTROM,
Kenneth, A. [US/US]; 2968 Mill Road, Doylestown,
PA 18901 (US). MCKENNA, Joseph, E. [US/US]; 130
Station Drive, North Wales, PA 19454 (US). BENTRIM,
Brian, G. [US/US]; 950 Forty Foot Road, Hatfield, PA
19440 (US).

(74) Agent: GORE, Gregory, J.; 70 West Oakland Avenue,
Suite 316, Doylestown, PA 18901 (US).

(81) Designated States (national): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE,
SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ,
VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (regional): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, SE, SI,
SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN,
GQ, GW, ML, MR, NE, SN, TD, TG).

Declaration under Rule 4.17:

— of inventorship (Rule 4.17(iv)) for US only

[Continued on next page]

(54) Title: SHEET METAL CABLE HOOK

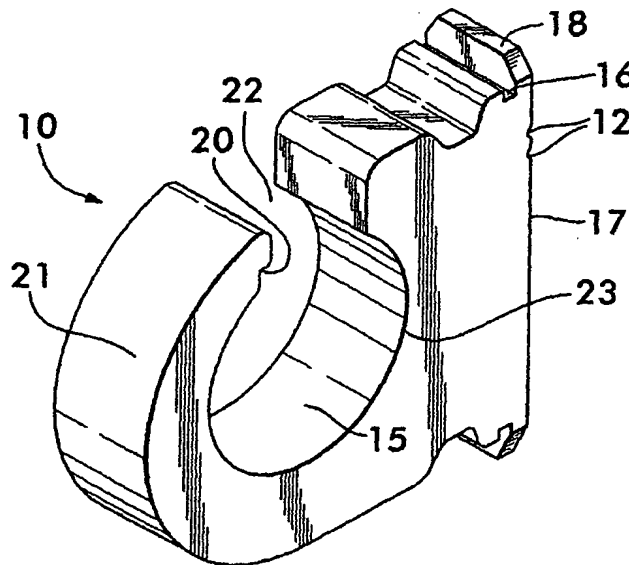

(57) Abstract: A cable hook includes attachment means with a substantially base having a planar bottom surface. The hook portion extends upwardly from the base (17) and includes upper and lower jaws (21, 23) with a lateral opening that is substantially circular. A single, laterally-extending notch (20) is located on the inside surface of the upper jaw proximate a frontal opening (22) between the jaws. Orientation marks (12) are included on the bottom surface of the base (17). Panel attachment means (18) are preferably deformer undercut grooves (16) for receiving the cold flow of metal from a metal panel (19) attached thereby. The hook (10) may be used to secure cables, a spring, a rod, tubing, or shaft.